

EE-T10BW Tablette PC 10" Fanless BayTrail durcie


TABLETTE PC DURCIE



- *Tablette PC 10" WUXGA (1920x1200) Luminosité 1000 cd*
- *Utilisable sous la pluie et avec gants*
- *Processeur E3827 DualCore à 1,75 GHz*
- *Interfaces RS232, USB et Ethernet RJ45*
- *Interfaces de communications GPS, 3G, 4G/ LTE, Wifi et Bluetooth v4.0*
- *Batterie secondaire amovible*
- *Modules d'extension optionnels*
- *Conforme IP65 et MIL STD 810G*
- *Large gamme d'accessoires*



- IP65, MIL-STD-810G, 5 feet drop resistance
- 802.11 ac built-in, optional 3.5G or 4G LTE
- Multi-touch supports, water provement, palm rejection, 2mm hard-tip stylus
- 2M and 5M AF with LED flash cameras
- Hot swappable dual battery design
- Wide expansion design with various peripherals

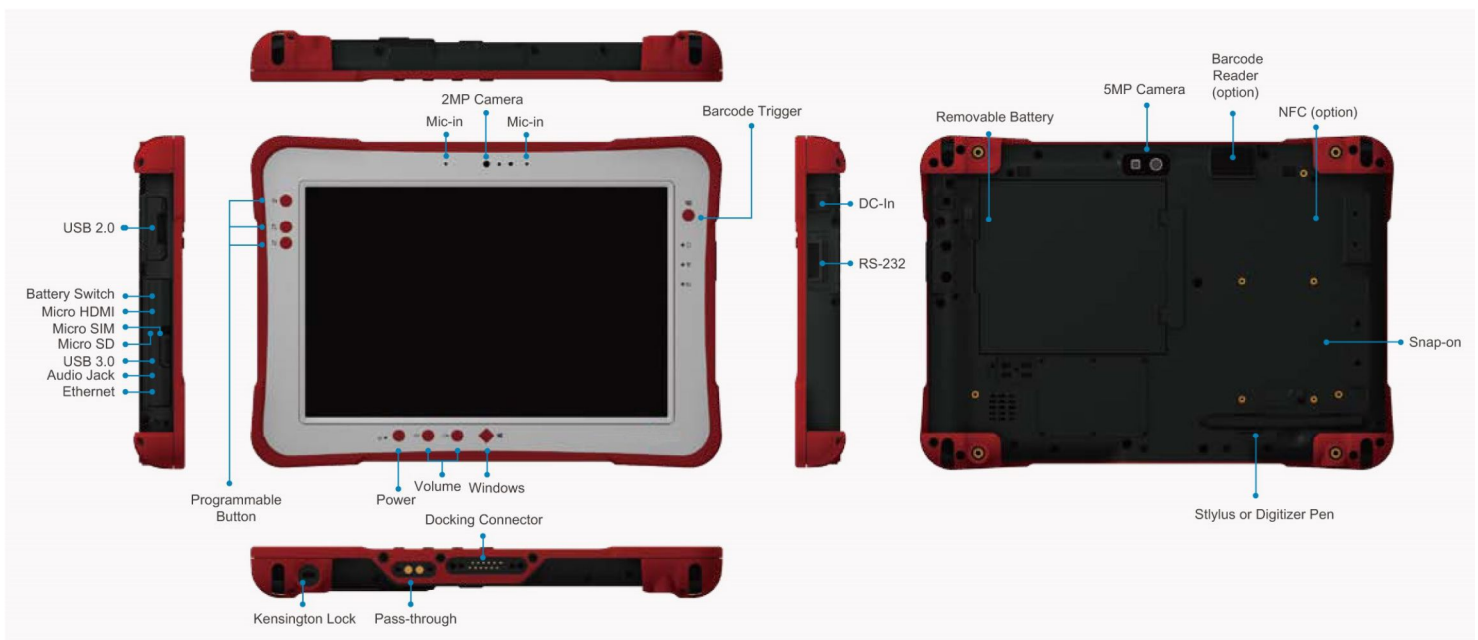

EE-T10BW Tablette PC 10" Fanless BayTrail durcie

Specifications

Operating System

- Windows Embedded 8.1 Industry 64-bit
- Windows Embedded Standard 8 64-bit
- Windows 7 Professional 64-bit
- Windows Embedded Standard 7 64-bit
- Android 4.4 (by request)

CPU

- Intel® Atom™ E3827 processor 1.75GHz

Memory

- 4GB DDR3L (8GB by request)

Storage

- 120GB mSATA SSD (option 240GB)

Display

- 10.1-inch 1920 x 1200 WUXGA; 1000 nit sunlight readable
- 10-point capacitive touch supports glove touch, water rejection, palm rejection, 2mm hard tip stylus
- Gorilla Glass3
- Digitizer by request

RF

- Wi-Fi 802.11 a/b/g/n/ac
- Bluetooth V4.0
- Optional 3.5G or 4G LTE
- GNSS(GPS/Glonass/BeiDou)

Webcam

- 2MP front camera
- 5MP rear camera with auto focus and LED flash

Data Collection

- NFC (option)
- 2D barcode reader (option)
- Smart card reader - CAC (snap-on, by request)
- Magnetic stripe reader (snap-on, by request)

Control Button

- Programmable button x 3
- Barcode trigger x 1
- Power, volume, Windows button

LED Indicator

- Power on/off
- Wi-Fi on/off
- Fn on/off
- Battery full/charging/low

Sensor

- Gyroscope, G-sensor, E-compass, light sensor

Power Adapter

- AC 100V~240V, 50~60Hz Input; 19VDC@3.42A, 65W

Battery

- Standard : 4500mAh, 10.8V, hot swappable
Battery operation* : 6 hours
- Extended : 9000mAh, 10.8V, hot swappable (option)
Battery operation* : 12 hours

*The listed battery life is based on MobileMark 2012[®] media mode testing.

I/O Interface

- USB 3.0 type A x 1, USB 2.0 type A x 1
- Gigabit ethernet (RJ-45) x 1
- RS-232 x 1 (optional for USB 2.0 type A)
- Audio jack (headphone/microphone combo) x1
- RF pass-through connector x 2 for WLAN, GNSS, WWAN
- 12-pin docking connector x1
- Speaker & microphone
- Micro SD slot x 1, Micro SIM slot x 1, Micro HDMI x 1

Dimensions and Weight

- 28 x 19.5 x 2.3 cm (11" x 7.7" x 0.9")
- 1.33 kg (2.93 lbs)

Rugged Features

- IP65, MIL-STD-810G, shock & vibration, 5 feet drop

Environment

- Operating temperature -20°C to 50°C
- Storage temperature -30°C to 70°C
- Humidity 5%~95%

Security

- TPM 1.2

IN-box Accessory

- Stylus
- Hand strap
- Shoulder strap
- Handle
- Power adapter

